

PRODUCT FACT SHEET

SEPTOR® HAZ-LO® HEADLAMP AAA BATTERY-POWERED C1D1 HEADLAMP

MARKET

APPLICATIONS: Professional Light - Industrial, Hardware/Tool, Automotive, Sporting Goods, Consumer,

Emergency Medical Services, Safety, Pest Control, Boating, Aviation.

DESCRIPTION: The light weight Septor® Haz-Lo® headlamp with adjustable head straps features (7) ultra bright

100,000 hour life white LEDs for wide task lighting and two power modes.

CASE MATERIAL: Tough thermoplastic plastic construction with elastomer over mold. Available in Yellow.

DIMENSIONS: Face Cap Diameter: 1.75 in. (4.45 cm)

Maximum Width: 2.70 in. (6.85 cm)

Maximum Depth: (Includes head strap mounting plate) 2.40 in. (6.09 cm)

WEIGHT: 5.50 oz (156 grams) with batteries (included with purchase).

LENS: Unbreakable polycarbonate lens.

LIGHT SOURCE: Seven (7) 5mm Ultra Bright White LEDs, impervious to shock with 100,000 hour lifetime.

LIGHT OUTPUT: Low -20 Lumens, 150 candela peak beam intensity, and 24 meter beam distance.

High -85 Lumens, 620 candela peak beam intensity, and 50 meter beam distance.

ON/OFF: Push button switch – Sequences through Low, High and Off.

RUN TIME: See chart for run time data. All runtime claims are to 10% of initial lumen output.

BATTERY: Three (3) "AAA" size, Alkaline batteries.

FEATURES: LED technology for extreme brightness.

IPX4 rated for water resistant operation.

2 meter impact resistance tested.

90° tilting head.

Rubber hard hat strap. (Included with purchase)

WARRANTY: Streamlight's Limited Lifetime Warranty

APPROVALS: Class 1, Division 1, Groups A,B,C,D; Class II, Division 1, Groups E,F,G; Class III, T-Class: T4 Exia. (Using: Rayovac No. 824, Panasonic AM-4PA, Energizer EA92, or Energizer Lithium L92

batteries.)

(Meets applicable European Community Directives.

OPTIONAL


ACCESSORIES: N/A


OUTPUT

RUNTIME

DISTANCE

INTENSITY



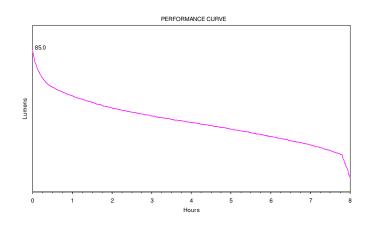

All performance claims to ANSI/ NEMA FL1-2009 Standard

Issued: 03/17/2014 Revised: 06/11/14 Rev: 1